

DEDICATED GRIPPER COUPLINGS

PRODUCT FEATURES


KLAMFLEX Gripper Couplings are designed to resist end pull out on PE and PVC pipes, it is the fastening action of the Gripper Rings that secures the Coupling onto the pipe resisting end pull out.

KLAMFLEX Gripper Couplings are manufactured from Ductile Iron, Gasket material is EPDM, Gripper material Brass, and coating in Fusion Bonded Epoxy.



Nuts & Bolts

Galvanised low carbon steel bolts and nuts (Stainless Steel on request).

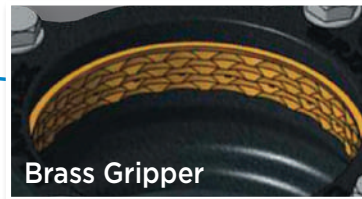


Brass Gripper

Brass Gripper ring to ensure pull out resistance.




Rubber & Coating

Non-toxic WRAS approved (EPDM rubber - Non-Toxic and FBE to 300 micron coating).

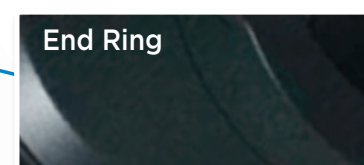

End Ring

WRAS approved FBE Coating to 300 micron Ductile iron.

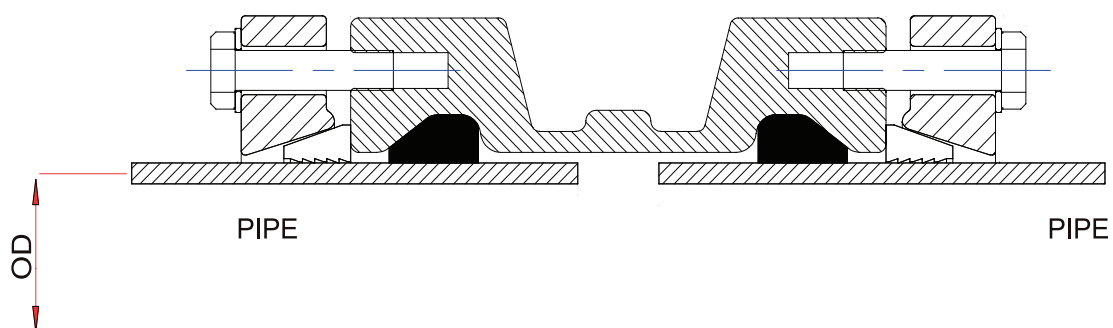

Nominal Bore (mm)	Pipe OD (mm)	Approx. Mass (kg)
50	63	3
65	75	4
80	90	5
100	110	7
150	160	10
200	200	18
250	250	32
300	315	48



Max working pressure: 16 BAR

Setting Gap: 19mm

Recommended bolt torque: 60-80Nm