

DEDICATED GRIPPER FLANGE ADAPTOR


PRODUCT FEATURES

KLAMFLEX Gripper Couplings are designed to resist end pull out on PE and PVC pipes, it is the fastening action of the Gripper Rings that secures the Coupling onto the pipe resisting end pull out.

KLAMFLEX Gripper Couplings are manufactured from Ductile Iron, Gasket material is EPDM, Gripper material Brass, and coating in Fusion Bonded Epoxy.




Nuts & Bolts

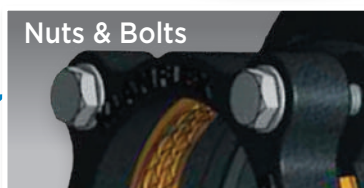


Galvanised low carbon steel bolts and nuts (Stainless Steel on request).

Brass Gripper

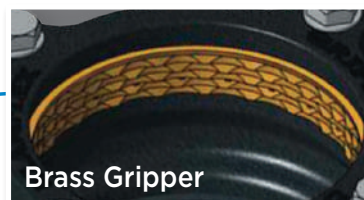


Brass Gripper ring to ensure pull out resistance.

Body & End Ring

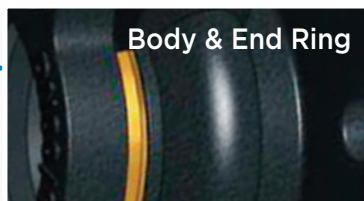


Non-toxic WRAS approved (EPDM) rubber - Non-Toxic and FBE to 300 micron coating).

Rubber & Coating

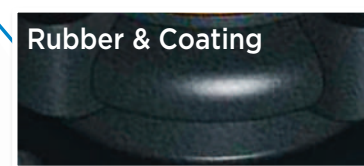

WRAS approved FBE Coating to 300 micron Ductile iron.

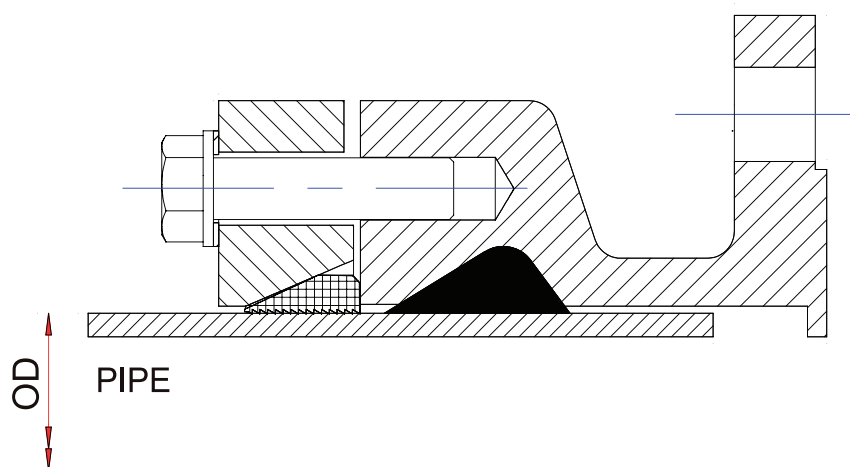

Nominal Bore (mm)	Pipe OD (mm)	Approx. Mass (kg)
50	50	3
50	63	4
65	75	5
80	90	5
100	110	6
100	125	6
150	160	13
150	180	13
200	200	13
200	225	18
250	250	25
250	280	28
300	315	38



Max working pressure: 16 BAR
Setting Gap: 19mm
Recommended bolt torque: 60-80Nm